

Sikaflex®-260

High-performance structural adhesive

Technical Product Data

Chemical base	1-C polyurethane	
Colour (CSQP ¹⁾ 001-1)	Black	
Cure mechanism	Humidity-curing	
Density (uncured) (CSQP 006-4)	1,2 kg/l approx.	
Non-sag properties (CSQP 061-1)	Very good	
Application temperature	+10°C to + 35°C	
Tack-free time ²⁾ (CSQP 019-1)	30 min. approx.	
Curing speed (CSQP 049-1)	(see diagram)	
Shrinkage (CSQP 014-1)	6% approx.	
Shore A hardness (CSQP 023-1 / ISO 868)	55 approx.	
Tensile strength (CSQP 036-1 / ISO 37)	8 N/mm ² approx.	
Elongation at break (CSQP 036-1 / ISO 37)	300% approx.	
Tear propagation resistance (CSQP 045-1 / ISO 34)	8 N/mm	
Tensile-shear strength (CSQP 046-1 / ISO 4587)	4 N/mm ² approx.	
Glass transition temperature (CSQP 509-1 / ISO 4663)	-50°C approx.	
Service temperature (CSQP 513-1)	-40°C to +90°C(°F)	
Shelf life (storage below 25°C) (CSQP 016-1)	cartridge	9 months
	hobcock and drum	6 months

¹⁾ CSQP = Corporate Sika Quality Procedures ²⁾ 23°C / 50% r.h.

Description

Sikaflex®-260 is a non-sag 1-c polyurethane adhesive of stiff, paste-like consistency that cures on exposure to atmospheric humidity to form a durable elastomer.

Sikaflex®-260 is manufactured in accordance with ISO 9001 / 14001 quality assurance system and with the responsible care program.

Product Benefits

- 1-C formulation
- Can be overpainted
- Capable of withstanding high dynamic stresses
- Vibration-damping
- Sound-absorbing
- Resistant to shock and impact
- Short cut-off string
- Can be sanded
- Resistant to ageing and weathering

Areas of Application

Sikaflex®-260 is suitable for structural joints that will be subjected to high dynamic stresses.

Suitable substrate materials include sheet steel (phosphated, chromated and zinc-plated), metal-primers and paint coatings (2-c systems), ceramic materials and timber.

Industry



Cure Mechanism

Sikaflex®-260 cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds more slowly (see diagram).

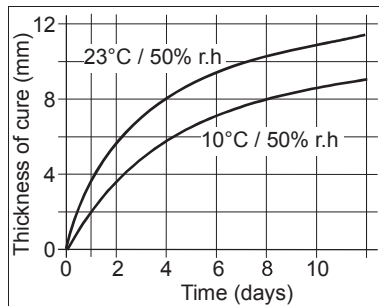


Diagram 1: Curing speed for Sikaflex®-260

Chemical Resistance

Sikaflex®-260 is resistant to fresh water, seawater, limewater, sewage effluent, dilute acids and caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, alcohol, concentrated mineral acids and caustic solutions or solvents.

The above information is offered for general guidance only. Advice on specific applications will be given on request.

Method of Application

Surface preparation

Surfaces must be clean, dry and free from all traces of grease, oil and dust. As a rule the bond faces must be prepared in accordance with the instructions given in the current Sika Primer Chart.

Advice on specific applications is available from the Technical Service Department of Sika Industry.

Application

Cartridges: Pierce cartridge membrane.

Unipacs: Place unipac in the application gun and snip off the closure clip.


For satisfactory results the adhesive must be applied with a piston-type cartridge gun (hand-operated or compressed-air).

Further Information

To ensure uniform thickness of adhesive when compressed, we recommend to apply the adhesive in the form of a triangular bead (see illustration)

Do not apply at temperatures below 10°C or above 35°C. The optimum temperature of substrate and adhesive is between 15°C and 25°C.

For advice on selecting and setting up a suitable pump system, as well as on the techniques of pump operated application, please contact the System Engineering Department of Sika Industry.

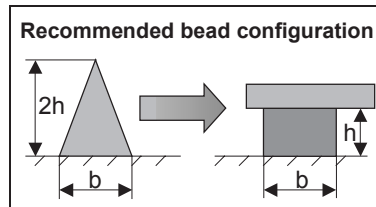

Tooling and finishing

Tooling and finishing must be carried out within the tack-free time of the adhesive. We recommend the use of Sika® Tooling Agent N. Other finishing agents or lubricants must be tested for suitability/compatibility.

Removal

Uncured Sikaflex®-260 can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically.

Hands and exposed skin should be washed immediately using Sika® Handclean Towel or a suitable industrial hand cleaner and water. Do not use solvents!

Overpainting

Sikaflex®-260 can be overpainted when tack-free.

The paint must be tested for compatibility by carrying out preliminary trials. Sikaflex®-260 should not be exposed to baking temperatures until it has attained full cure. It should be understood that the hardness and film thickness of the paint may impair the elasticity of the adhesive and lead to cracking of the paint film.

Further Information

Copies of the following publications are available on request:

- Material Safety Data Sheets
- Sika Primer Chart
- General guidelines for bonding and sealing with Sikaflex® products

Packaging Information

Cartridge	310 ml
Unipac	600 ml
Hobbock	23 l
Drum	195 l

Important

For information and advice regarding transportation, handling, storage and disposal of chemical products, users should refer to the actual Material Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.



Sika Egypt for Construction Chemicals
 El Abour City
 1st industrial zone (A)
 Section # 10 Block 13035
 Tel.: +202-46100714/15/16/17/18
 Fax: +202-46100759
 Mob: +2012-3908822/55
 www.sika.com.eg



Transportation